
886 Facility Post

with Standard Width Webbing

Perfect for indoor and outdoor use. Features a heavy duty base with easy carry handles. Ideal for health and safety applications.

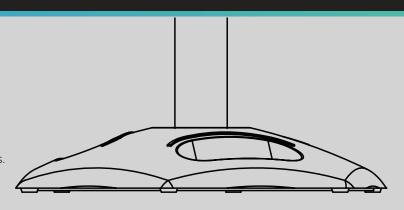

433mm 486mm 3.65M Maximum 960mm Weight 8kg

Features & Benefits

- The facility post features a lightweight plastic post that screw fixes into a recycled rubber heavy duty base.
- The post and base can be quickly and easily dismantled for easy storage and transportation.
- The robust base can be walked or driven over and it will still retain its shape and function.
- Ideal for indoor and outdoor use, but shouldn't be permanently placed outside.
- The safest barrier on the market our cassettes have a unique braking system for slower webbing retraction.


Product Specification

- Plastic post available in 4 UV stable colours.
- Black recycled rubber base with easy carry handles, which allows for the post to be easily screwed into place.
- Shipped flat packed with no tools required.
- Available with any Tensator® standard (50mm) webbing options.
- Modular webbing cassette all cassettes come as standard with our fourpoint anti-tamper webbing connectivity. This allows you to connect other Tensabarrier® products to the receiver splines on the cassette head.
- Compatible with all Tensabarrier® accessories including our range of post top signage.
- Available to buy in a twin pack.

Applications

- Eliminate unsafe working conditions by clearly defining routes.
- Restrict access to dangerous areas.
- Use to identify hazards before they cause harm.
- Ideal for warehouses, industrial and maintenance areas.
- Indoor and outdoor use.

Product Configuration





Heavy Duty Base

Post Finishes



Four plastic finishes available

Webbing Options





Standard Dual Wide Webbina Webbina Line



Webbing Lengths



50mm

width



width



150mm







Webbing Designs






and custom options

Tape End Options









MILTON KEYNES +44 1908 684 600

NFW YORK +1 631 666 0336

DUBAI +971 4 2997 228

PARIS +33 1 43 09 85 00

FRANKFURT +49 69 3003 89 010

WROCLAW +48 71 359 3800